

## PERFORMANCES

P1 Resistance to anti-burglary EN 1627 / EN 85160

**Degree 3**



## SERIES EQUIPMENT


- 86 mm thick galvanized steel sheet.
- Galvanized steel sheet and frame profiles (white laminated PVC option).
- 3-point safety lock with Ø18 mm bolts.
- Class 7 anti-drill protection in the lock and class 4 in pz cylinder protection.
- Anti-clamp protection system.
- Smooth galvanized steel panels (white laminated PVC option).
- Two adjustable hinges in height and inclination.
- Three Ø18 mm anti-lever bolts between hinges.
- Accessory box, includes 10-pin safety cylinder with 5 keys + 1 work key, protection shield and mounting hardware.
- Door handle box, includes double-sided door handle. No door knob, no peephole, no restrictive opening knob and no wind break.
- Standard measures free passage:  
 Width 724 / 804 / 904  
 Height 1954 / 2014 / 2034 / 2134

## OPTIONAL EQUIPMENT\*

- Pre-framework.
- Types of looks.
- Microperforated or ventilation grill.
- Metal cover.

\*Check the equipment available in the tariff.

**V 1.3**

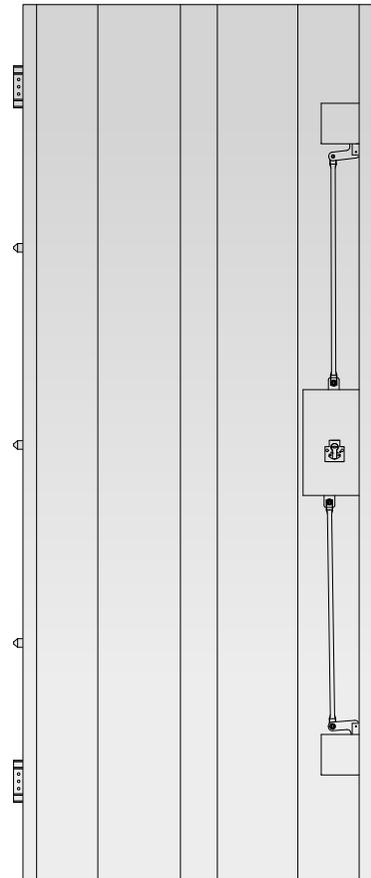

## INSTALLATION TYPES



**B-** Metal pre-frame with plate finished with work, for exterior.



**D-** Metal pre-frame with plate finished with metal cover.

## FINISHES


### PROFILES AND PANELS



### DOOR HANDLES



## PANEL TYPES

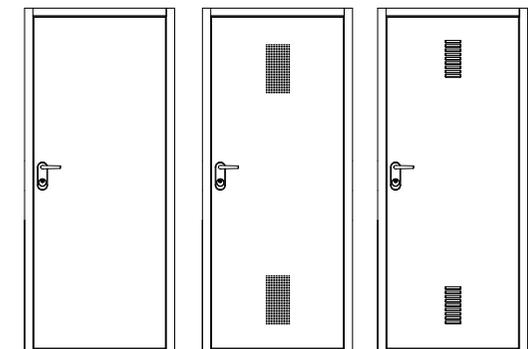

Blind

Microperforated

Ventilation grill